


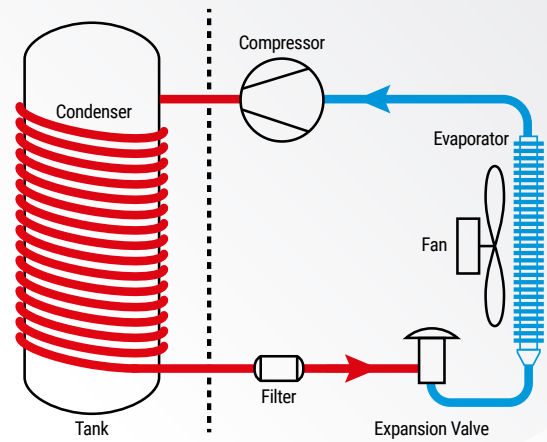

### How does a heat pump work?

To understand the concept of heat pumps, imagine a refrigerator working in reverse.

While a refrigerator removes heat from an enclosed box and expels that heat to the surrounding air, a heat pump takes the heat from surrounding air and transfers it to water in an enclosed tank.

Heat pump technology makes efficient use of the heat in the surrounding air, even at temperatures as low as -7°C.

In fact, the WULFE system is so efficient that it can convert 1kW of electricity into over 4kW of heat.

**CERTIFICATE OF CONFORMITY**  
Under the provisions of the Energy Group Australia Pty Ltd  
**Energy Group Australia Pty Ltd**  
400 Victoria Road, Manly, NSW, Australia 1585 0000  
Energy Group Australia Pty Ltd

Endorsed by:  
AS/NZS 2712:2007 (inc. Amendments 1, 2 & 3)  
Solar and heat pump water heaters - Design and construction

Manufacturer:  
Refer to License Holder

License No.: 1000 0120708  
 First Certificate: 20 May 2020  
 Expiry Date: 19 May 2021

Chief Executive Officer of the IAPMO Group

**IAPMOMARK LICENCE**  
Under the provisions of the Energy Group Australia Pty Ltd  
**Energy Group Australia Pty Ltd**  
400 Victoria Road, Manly, NSW, Australia 1585 0000  
Energy Group Australia Pty Ltd

Endorsed by:  
AS/NZS 2712:2007 (inc. Amendments 1, 2 & 3)  
Solar and heat pump water heaters - Design and construction

Manufacturer:  
Refer to License Holder

License No.: 1000 0120708  
 First Certificate: 20 May 2020  
 Expiry Date: 19 May 2021

Chief Executive Officer of the IAPMO Group

Available from:



ver 260718.00

| Model                                                                         | WPW200M9           | WPW330M9           |
|-------------------------------------------------------------------------------|--------------------|--------------------|
| Total water capacity                                                          | 190L               | 330L               |
| Rated voltage / frequency                                                     | 220-240V/50Hz      | 220-240V/50Hz      |
| Tank max pressure                                                             | 850kPa             | 850kPa             |
| Corrosion protection                                                          | Magnesium rod      | Magnesium rod      |
| Waterproof grade                                                              | IPX4               | IPX4               |
| Performance (20°C/15°C Ambient air temperature, 15°C -55°C water temperature) |                    |                    |
| COP*1@ 20°C/15°C                                                              | 4.16               | 4.04               |
| Power input of electric element                                               | 1500W              | 1500W              |
| Rated power input of heat pump                                                | 780W               | 820W               |
| Maximum power input of heat pump                                              | 1500W              | 1500W              |
| Maximum power input                                                           | 1500W              | 1500W              |
| Average heating capacity by heat pump                                         | 3200W              | 3300W              |
| Default temperature setting                                                   | 60°C               | 60°C               |
| Temperature setting range - with heater                                       | 60°C - 75°C        | 60°C - 75°C        |
| Max temperature of the heat pump only                                         | 65°C               | 65°C               |
| Max working pressure of refrigerant                                           | 1.0/3.3MPa         | 1.0/3.3MPa         |
| Refrigerant type / weight                                                     | R290/0.42kg        | R290/0.47kg        |
| Sound pressure level*2 @ 2m                                                   | 42dB(A)            | 42dB(A)            |
| Ambient temperature for heat pump and element                                 | -7~45°C            | -7~45°C            |
| Ambient temperature of heat pump                                              | -7~45°C            | -7~45°C            |
| Water inlet and outlet connection                                             | Rp ¾"              | Rp ¾"              |
| TPR valve connection                                                          | Rp ¾"              | Rp ¾"              |
| Drain & Water inlet connection                                                | Rp ¾"              | Rp ¾"              |
| Product Dimensions                                                            | 580 x 620 x 1746mm | 710 x 740 x 1923mm |
| Packing dimension with pallet                                                 | 695 x 695 x 2060mm | 745 x 745 x 2263mm |
| Net/Gross weight                                                              | 93/119kg           | 119/148kg          |
| Filled weight of the appliance                                                | 282kg              | 449kg              |


\*1 The COP was measured under test conditions with an ambient air temperature of 20°C/15°C (Dry Bulb/Wet Bulb) and heating of the water from 15°C to 55°C during water heater operation.  
 \*2 The noise level was measured at 2m from the water heater during a Noise Test conducted to Standard GB/T 23137 in a hemi-anechoic chamber within a laboratory.

#### \*RESIDENTIAL WARRANTY

Warranty is for the original owner/occupier purchaser only. Other owners warranty is 5 year with parts and 2 year labour.

\*COMMERCIAL & NONRESIDENTIAL WARRANTY 3-year product warranty and 1 year labour warranty

| Model    | A   | B   | C    | D    |
|----------|-----|-----|------|------|
| WPW200M9 | 620 | 258 | 970  | 1746 |
| WPW330M9 | 740 | 282 | 1119 | 1923 |

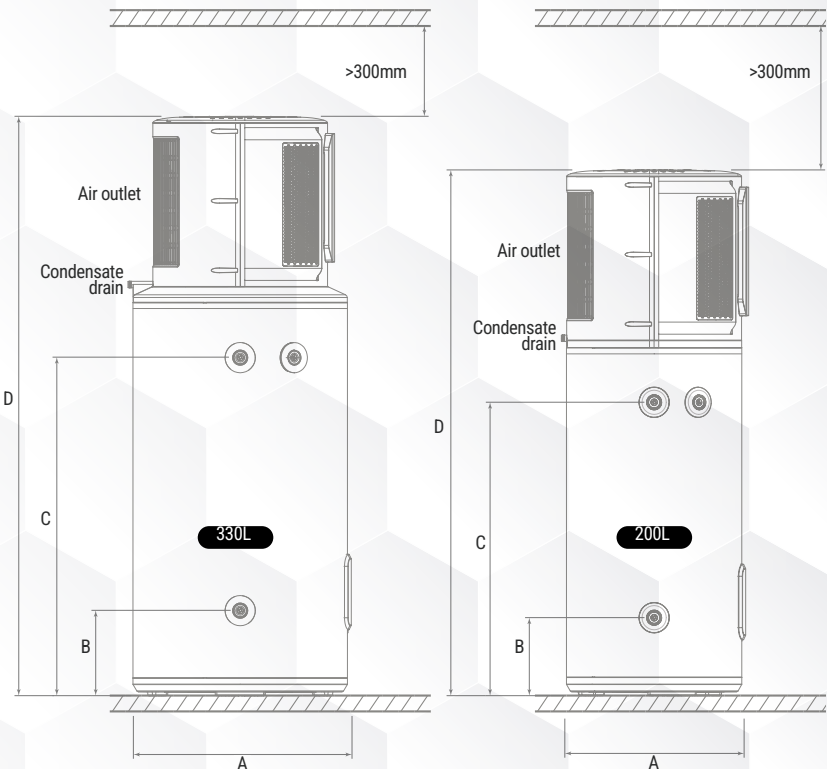

# More hot water for the whole pack

Higher efficiency  
 Faster recovery  
 Super quiet



UP TO  
**73% CHEAPER\***  
 TO RUN  
 \* compared to electric hot water systems



# Introducing the next generation in energy efficient hot water systems – WULFE HP Plus

The WULFE HP Plus is a cutting-edge air source heat pump that combines efficiency, innovation, and sustainability like never before. Designed with Australian families in mind, WULFE HP Plus delivers performance and reliability, setting a new standard in efficiency.

## Key features

**Environmentally friendly:** Say goodbye to harmful refrigerants! WULFE HP Plus utilises natural R290 refrigerant, making it a responsible choice for the planet, a choice customers demand.

**Efficiency redefined:** Powered by inverter technology, the WULFE HP Plus ensures faster recovery times and higher efficiency, so you can enjoy hot water whenever you need it.

**Whisper-quiet operation:** Experience peace and tranquillity with WULFE HP Plus's super-quiet operation. Emitting just 42dBA during operation, guarantees your customer peace and neighbourly harmony.

**Innovative design:** Two years in development and decades of experience makes the HP Plus the clear choice for Australian homes.

**Versatile capacity:** Available in 200L and 330L models, WULFE HP Plus offers the largest capacity range on the market, catering to families of all sizes with ease.

**User-friendly interface:** Intuitive TFT LCD control screen makes customising the operation of the WULFE HP Plus unit a breeze.

**Extended lifespan:** With triple full-length anodes, WULFE HP Plus ensures maximum durability and longevity, giving you peace of mind for years to come.

**ACTIV8 technology:** The patented ACTIV8 app for iOS and Android takes the hard work out of claiming government rebates – claim onsite, on your phone; without any paperwork!

**Customisable modes:** Choose from four operating modes to suit your customer's preferences and lifestyle; All Electric, Fast Recovery, Eco, and Mute mode for silent overnight heating – wake to a hot shower every morning!

## Why choose WULFE HP Plus?

Plumbers trust WULFE for industry-leading innovation and quality manufacture. With WULFE HP Plus, you can offer your customers a hot water solution that exceeds expectations, backed by reliability and performance.

## Experience the future of hot water, today!


Join the leader of the pack and make the switch to WULFE! Contact us today to learn more about how the WULFE HP Plus can transform your customer's hot water experience.



TFT LCD screen for easier operation in any lighting condition




Mute mode for silent overnight heating and hot showers every morning

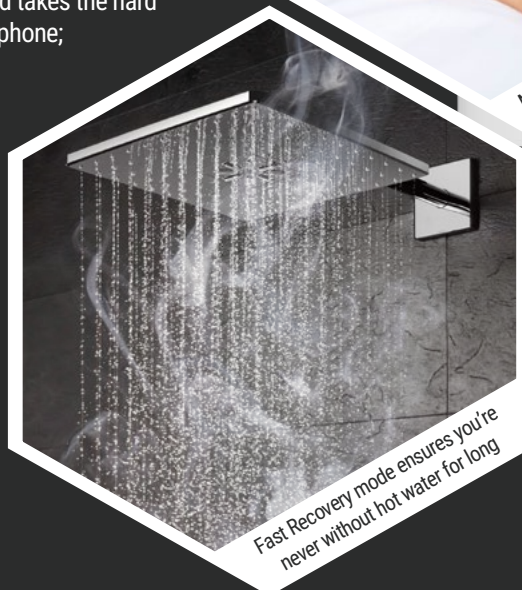

Fast Recovery mode ensures you're never without hot water for long



UP TO  
**73% CHEAPER\***  
TO RUN  
\* compared to electric hot water systems

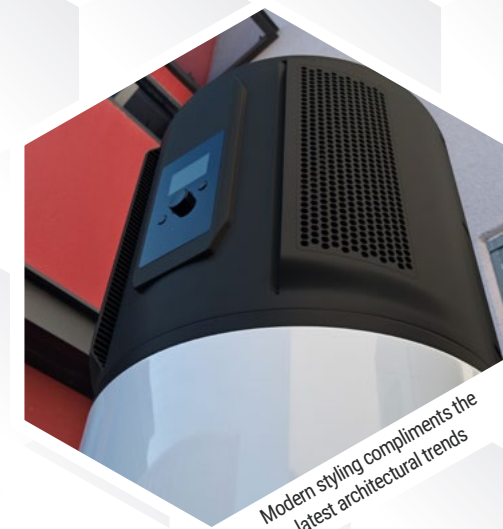

Modern styling compliments the latest architectural trends



Intelligent inverter technology for Auto, Mute, Eco and Fast Recovery modes



Tap into your solar power and save even more off your water heating bills

## Enjoy free hot water — with your solar PV system

WULFE HP Plus is the perfect partner for a roof top solar power system. Store up to 21kW\*\* of heat energy in a WULFE HP Plus heat pump tank ready to use when the sun has gone down.

Whether your customer's already have solar power, or are considering it in the future, WULFE HP Plus is the clear choice to ensure a low energy home.

The HP Plus advanced control system is equipped with an automatic timer that allows customers to maximise their solar power utilisation and a second timer allows for an early morning boost to ensure they never run out of hot water.

\*\* based on the energy required to raise 330L of water from an inlet temperature of 10°C to 65°C final temperature